

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number
WO 03/061368 A1

(51) International Patent Classification⁷: **A01F 12/18**,
5/00, 9/00

(74) Agent: **HOLLIDAY, Neal, Joseph**; Lord and Company,
4 Douro Place, West Perth, Perth, Western Australia 6005
(AU).

(21) International Application Number: **PCT/AU03/00069**

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PS 0130 25 January 2002 (25.01.2002) AU
PS 0928 7 March 2002 (07.03.2002) AU

(71) Applicant and


(72) Inventor: **KING, John, Andrew** [AU/AU]; 27 Lamont St,
Ongerup, Western Australia 6336 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **GRAIN THRESHING DEVICE**

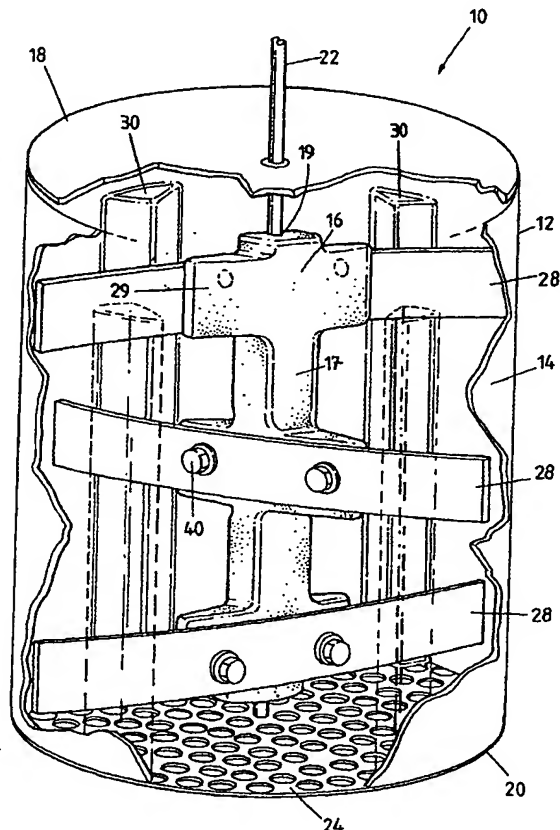

(57) Abstract: A grain threshing device (10) comprising a receptacle (12) for receiving a portion of crop head. The receptacle (12) has a plurality of longitudinal ribs (30) on inner surfaces. One or more flexible arm members (28) are arranged on a rotating shaft (22) within the receptacle (12) such that the flexible arm members (28) strike the ribs (30) during rotation. The action of the flexible arm members (28) and ribs (30) on the crop head within the receptacle (12) separates the grain from the crop head.

WO 03/061368 A1